





1999

SKEEETER[®]
PERFORMANCE FISHING BOATS

ZX 195 SC/DC

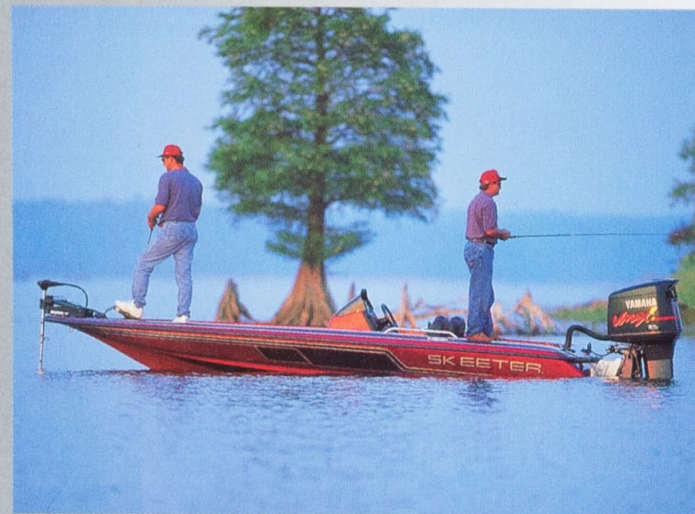

Exclusive Rod Staze™



Bow traction mat



Deluxe contour seats



CAPACITIES & SPECIFICATIONS


| | | | | |
|--------------------------------|---------------------------------|------------------------|-----------------------|--------------------|
| length on trailer 25'9" | width on trailer 101" | length 19'5" | beam 92" | transom height 23" |
| height overall 41" | interior depth 17" | draft 16" | dry weight 1,550 lbs. | max h.p. 200 h.p. |
| max weight capacity 1,484 lbs. | max persons capacity 6/900 lbs. | fuel capacity 50 gals. | | |



ZX195 STANDARD PACKAGE ZX195 fiberglass boat (single or dual console model) • Skeeter deluxe tandem-axle tube trailer with disc brakes, spare tire and carrier, tie-downs and transom saver • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX60 foot operated trolling motor (MotorGuide®), 60 lbs. thrust with gator mount

ZX195 STANDARD FEATURES composite construction • sequin finish deck and hull sides and stripes with sequin pinstripes and gelcoat running surface • contour driver and passenger seating with flip-down center seat • cockpit command center with ZX series tachometer, speedometer, volt meter, fuel gauge, water pressure gauge, trim gauge and horn • bow panel with troll receptacle and trim switch • fishing chair with 13" fixed height extension • bike seat with power pro pole • tinted windscreen • stainless steel handrails • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • gas-assisted lifts on front and rear storage doors, rod box doors and bilge access doors • dual-cable tilt steering • driver and passenger glove boxes • driver and passenger drink holders • built-in cooler (under passenger seat) • heavy-duty 12" jackplate • stretched sponsons, no-splashwell design • insulated doors • bow traction mat • bow and stern lights with holders • dual 25-gallon fuel system • manual 800 gph bilge pump & automatic 1500 gph bilge pump • interior light package (rod, storage boxes and livewells) • Dual Pro battery charger • 6-gauge trolling motor wiring system • 12-volt accessory outlet in dash • 3 battery trays • nested hatch, aluminum frame deck structure (rear) • roto-molded drop-in storage with cargo pads • 3 built-in retractable Rod Staze™

livewell
rod storage
storage
cooler
rigging

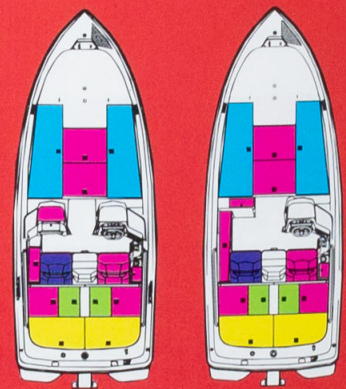


ZX195DC ZX195SC



ZX185 STANDARD PACKAGE ZX185 fiberglass boat (single or dual console model) • Skeeter deluxe single-axle tube trailer with disc brakes, spare tire and carrier, tie-downs and transom saver • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX60 foot operated trolling motor (MotorGuide®), 60 lbs. thrust with gator mount


ZX185 STANDARD FEATURES composite construction • sequin finish deck and hull sides and stripes with sequin pinstripes and gelcoat running surface • contour driver/companion seating with flip-down center seat • cockpit command center with ZX series tachometer, speedometer, volt meter, fuel gauge, water pressure gauge, trim gauge and horn • fishing chair with 13" fixed height extension • bike seat with power pro pole • tinted windscreen • stainless steel handrails • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • gas-assisted lifts on rod box doors, front storage doors and bilge access door • dual-cable tilt steering system • driver and passenger glove box • driver and passenger drink holders • built-in cooler (under passenger seat) • standard 12" jackplate • stretched sponsons, no-splashwell design • insulated doors • bow traction mat • bow and stern lights with holders • 36-gallon built-in fuel system • auto/manual 800 gph bilge pump • interior light package (rod, storage boxes and livewells) • Dual Pro battery charger • 6-gauge trolling motor wiring system • 12-volt accessory outlet in dash • 3 battery trays • roto-molded drop-in storage with cargo pads • 3 built-in retractable Rod Staze™

livewell
rod storage
storage
cooler
rigging

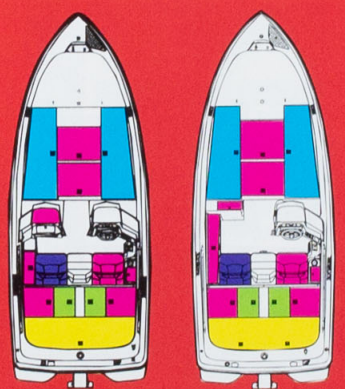

ZX185DC ZX185SC

ZX 185 SC/DC



Large rear deck with roto-molded storage



Extra-large casting deck



Cockpit command center



CAPACITIES & SPECIFICATIONS

| | | | | |
|--------------------------------|---------------------------------|------------------------|-----------------------|--------------------|
| length on trailer 24' | width on trailer 101" | length 18'5" | beam 92" | transom height 23" |
| height overall 47" | interior depth 17" | draft 15" | dry weight 1,325 lbs. | max h.p. 175 h.p. |
| max weight capacity 1,250 lbs. | max persons capacity 5/675 lbs. | fuel capacity 36 gals. | | |

ZX 19

SC/DC




Bench seating



Console



Under-seat storage

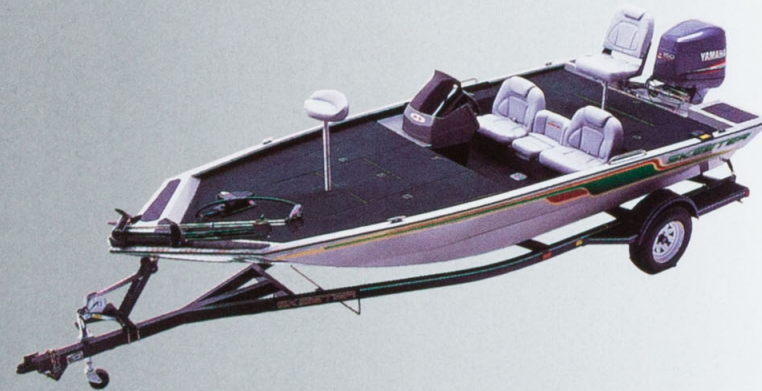

CAPACITIES & SPECIFICATIONS


| | | | | | |
|--------------------------------|---------------------------------|------------------------|---------------------|--------------------|----------------------|
| length 19' | beam 90" | bottom width 60" | transom height 20" | interior depth 19" | hull thickness .100" |
| length on trailer 21'5" | width on trailer 90" | max h.p. 150 h.p. | dry weight 910 lbs. | | |
| max weight capacity 1,400 lbs. | max persons capacity 4/825 lbs. | fuel capacity 20 gals. | | | |



X-TREME
Channel Construction

ZX19 STANDARD PACKAGE ZX19 aluminum boat (single or dual console model) • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX55 foot operated trolling motor (MotorGuide®), 55 lbs. thrust with gator mount

ZX19 STANDARD FEATURES all-welded X-TREME channel construction • aluminum floors and decks • polyurethane two-component paint • contour driver and passenger seats with removable center seat • cockpit command center with ZX series tachometer, speedometer, trim gauge, fuel gauge and horn • 2 fishing chairs with pedestals • tinted windscreen • stainless steel handrails • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • divided rear aerated livewell • dual-cable rack-and-pinion steering system • built-in storage under driver and passenger seats • insulated doors • bow and stern lights and holders • 20-gallon built-in fuel system • automatic 800 gph bilge pump • 6-gauge trolling motor wiring system • 3 battery trays • roto-molded storage boxes • cargo pads (front storage boxes only) • 4 cleats • bow and stern traction mats

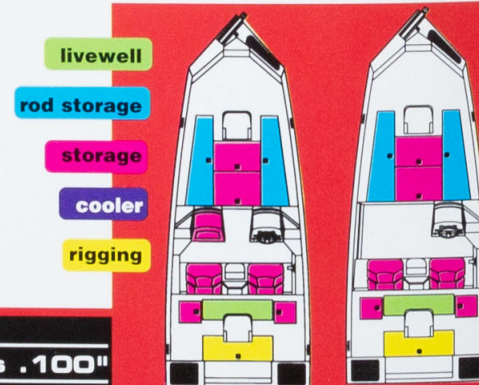

ZX19DC


ZX19SC



X-TREME
Channel Construction

ZX18 STANDARD PACKAGE ZX18 aluminum boat (single or dual console model) • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX41 foot operated trolling motor (MotorGuide®), 43 lbs. thrust with mount

ZX18 STANDARD FEATURES all-welded X-TREME channel construction • aluminum floors and decks • polyurethane two-component paint • contour driver and passenger seats with removable center seat • cockpit command center with ZX series tachometer, speedometer, trim gauge, fuel gauge and horn • 2 fishing chairs with pedestals • tinted windscreen • stainless steel handrails • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • divided rear aerated livewell • single-cable rack-and-pinion steering system • built-in storage under driver and passenger seats • insulated doors • bow and stern lights and holders • 20-gallon built-in fuel system • automatic 800 gph bilge pump • 6-gauge trolling motor wiring system • 3 battery trays • roto-molded storage boxes • cargo pads (front storage boxes only) • 4 cleats • bow and stern traction mats

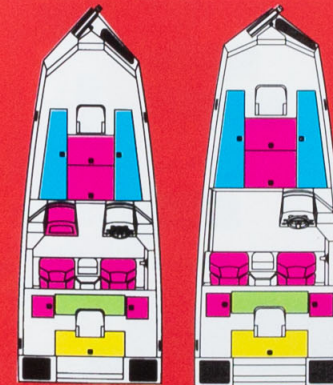

ZX18DC

ZX18SC

| | | | | | |
|--------------------------------|---------------------------------|------------------------|---------------------|----------------------|----------------------|
| length 18' | beam 84" | bottom width 56" | transom height 20" | interior depth 18.5" | hull thickness .100" |
| length on trailer 20' | width on trailer 84" | max h.p. 130 h.p. | dry weight 893 lbs. | | |
| max weight capacity 1,200 lbs. | max persons capacity 4/650 lbs. | fuel capacity 20 gals. | | | |

ZX 18

SC/DC



Storage




Large casting decks



Console



ZX 17

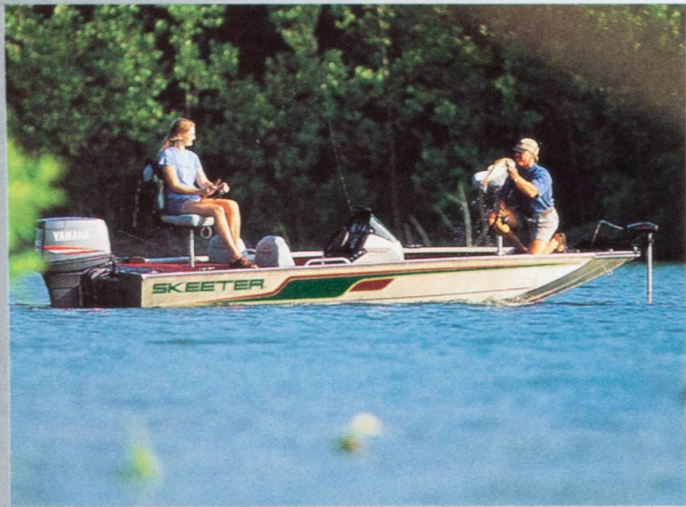

Storage




Under-seat storage



ZX17 STANDARD PACKAGE ZX17 aluminum boat • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX41 foot operated trolling motor (MotorGuide®), 43 lbs. thrust with mount

ZX17 STANDARD FEATURES all-welded X-TREME channel construction • aluminum floors and decks • polyurethane two-component paint • contour driver and passenger seats with removable center seat • cockpit command center with ZX series tachometer, speedometer, trim gauge, fuel gauge and horn • 2 fishing chairs with pedestals • tinted windscreen • stainless steel handrails • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • divided rear aerated livewell • single-cable rack-and-pinion steering system • built-in storage under driver and passenger seats • insulated doors • bow and stern lights and holders • 20-gallon built-in fuel system • automatic 800 gph bilge pump • 6-gauge trolling motor wiring system • 3 battery trays • roto-molded storage boxes • cargo pads (front storage boxes only) • 4 cleats • bow and stern traction mats

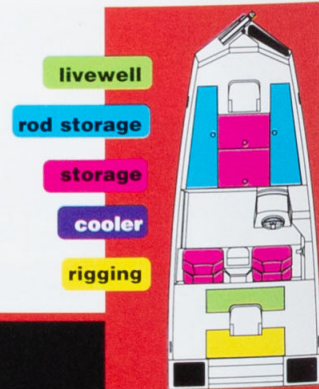


ZX17



SX18 STANDARD PACKAGE SX18 aluminum boat • Skeeter custom tube trailer with spare tire carrier and tie-downs • Lowrance X-25B (dash) with rear transducer • MotorGuide® 743 foot operated trolling motor, 43 lbs. thrust with mount

SX18 STANDARD FEATURES welded construction • new X-CALIBUR running surface • composite floor and decks • polyurethane two-component paint • single-cable rack-and-pinion steering system • bench seat • 2 fold-down fishing chairs • cockpit command center with Skeeter series tachometer, speedometer, trim gauge, fuel gauge and horn • bow and stern lights and holders • divided rear aerated livewell • under-bench seat storage • 20-gallon built-in fuel system • 800 gph bilge pump • 8-gauge 12/24-volt trolling motor wiring system • 2 battery trays • 4 cleats • bow and stern traction mats

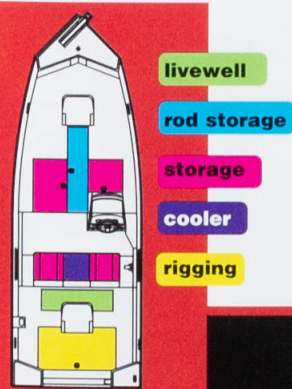

SX18


SX 18



Optional bike seat



Livewell and storage

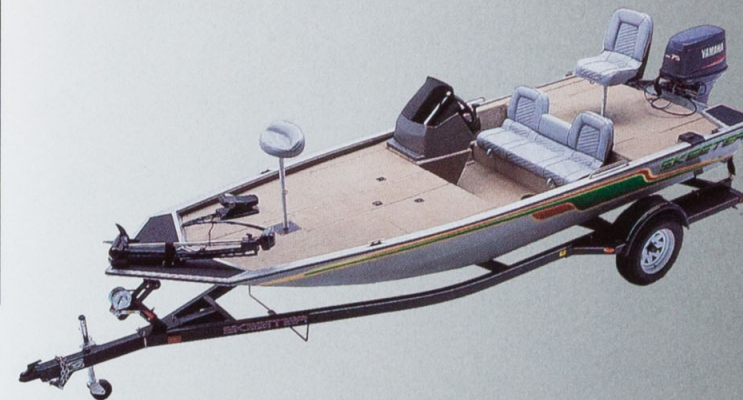

CAPACITIES & SPECIFICATIONS

| | | | | | |
|--------------------------------|---------------------------------|------------------------|---------------------|----------------------|----------------------|
| length 17' | beam 84" | bottom width 56" | transom height 20" | interior depth 17.5" | hull thickness .100" |
| length on trailer 19'7" | width on trailer 84" | max h.p. 90 h.p. | dry weight 850 lbs. | | |
| max weight capacity 1,200 lbs. | max persons capacity 4/650 lbs. | fuel capacity 20 gals. | | | |

| | | | | | |
|--------------------------------|---------------------------------|------------------------|---------------------|--------------------|----------------------|
| length 18' | beam 72" | bottom width 56" | transom height 20" | interior depth 20" | hull thickness .100" |
| length on trailer 19'6" | width on trailer 74" | max h.p. 115 h.p. | dry weight 880 lbs. | | |
| max weight capacity 1,200 lbs. | max persons capacity 4/650 lbs. | fuel capacity 20 gals. | | | |


SX 17



Large casting deck




Console

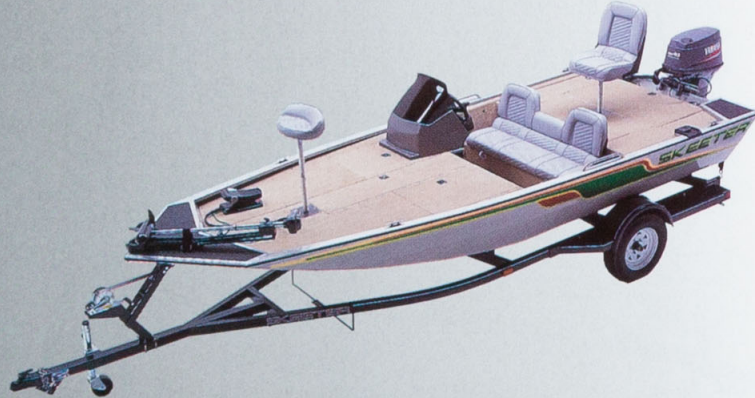

SX17 STANDARD PACKAGE SX17 aluminum boat • Skeeter custom tube trailer with spare tire carrier and tie-downs • Lowrance X-25B (dash) with rear transducer • MotorGuide® 743 foot operated trolling motor, 43 lbs. thrust with mount

SX17 STANDARD FEATURES welded construction • new X-CALIBUR running surface • composite floor and decks • polyurethane two-component paint • single-cable rack-and-pinion steering system • bench seat • 2 fold-down fishing chairs • cockpit command center with Skeeter series tachometer, speedometer, trim gauge, fuel gauge and horn • bow and stern lights and holders

- divided rear aerated livewell • under-bench seat storage • 20-gallon built-in fuel system
- 800 gph bilge pump • 8-gauge 12/24-volt trolling motor wiring system • 2 battery trays
- 4 cleats • bow and stern traction mats

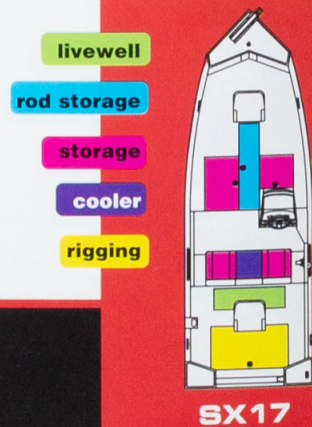

SX17



SX17PF STANDARD PACKAGE SX17PF aluminum boat • Skeeter custom tube trailer with spare tire carrier and tie-downs • Lowrance X-25B (dash) with rear transducer • MotorGuide® 743 foot operated trolling motor, 43 lbs. thrust with mount

SX17PF STANDARD FEATURES welded construction • composite floor and decks • polyurethane two-component paint • stick steering • 2 fold-down fishing chairs (locking driver's chair) • bow and stern lights and holders

- center aerated livewell/storage/seat combination • removable 34-quart cooler • 6-gallon portable fuel tank • 800 gph bilge pump • 8-gauge 12-volt trolling motor wiring system
- 2 battery trays • 4 cleats • bow traction mat



SX17PF

SX 17PF




Portable ice chest



Locking driver's seat



Livewell

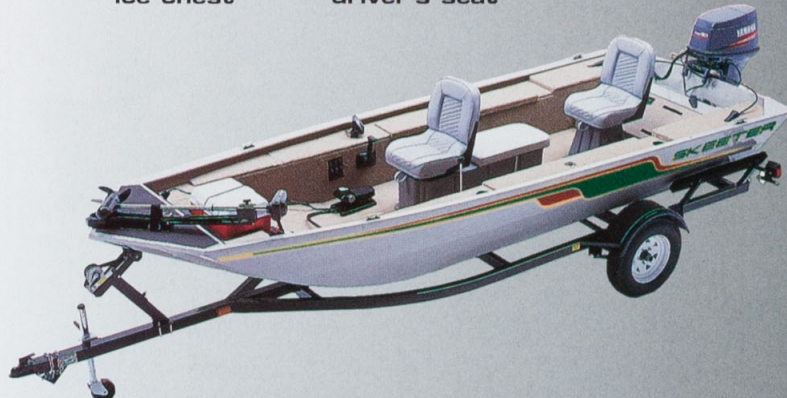

CAPACITIES & SPECIFICATIONS

| | | | | | |
|--------------------------------|---------------------------------|------------------------|---------------------|--------------------|----------------------|
| length 17' | beam 72" | bottom width 56" | transom height 20" | interior depth 20" | hull thickness .100" |
| length on trailer 18'6" | width on trailer 74" | max h.p. 75 h.p. | dry weight 760 lbs. | | |
| max weight capacity 1,000 lbs. | max persons capacity 4/575 lbs. | fuel capacity 20 gals. | | | |

CAPACITIES & SPECIFICATIONS

| | | | | | |
|--------------------------------|---------------------------------|---------------------------------|---------------------|--------------------|----------------------|
| length 17' | beam 70" | bottom width 50" | transom height 20" | interior depth 22" | hull thickness .100" |
| length on trailer 18'6" | width on trailer 74" | max h.p. 40 h.p. | dry weight 620 lbs. | | |
| max weight capacity 1,000 lbs. | max persons capacity 4/685 lbs. | fuel capacity 6 gals.(portable) | | | |

DEEP V 1850 WT/C



Two-tone
seats

Extra-wide
gunnels

Console




CAPACITIES & SPECIFICATIONS

length overall 18'6" | beam 92" | bottom width 74" | transom height 20" | interior depth 29"
bow depth 44" | hull thickness .100" | length on trailer 23'9" | width on trailer 98"
max h.p. 150 h.p. | max weight capacity 1,450 lbs. | max persons capacity 6/875 lbs. | fuel capacity 30 gals.



DEEP V 1850 STANDARD PACKAGE Deep V 1850 aluminum boat (walk-through or console model) • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher with temp and transducer • Spare tire carrier and tie-downs

DEEP V 1850 STANDARD FEATURES polyurethane two-component paint • composite floors and decks • Skeeter speedometer, tachometer, trim gauge, fuel gauge, water pressure gauge, volt meter and horn • 4 fishing chairs, pedestals and 5 base plates • two livewells • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and pump timer • walk-thru windshield (1850WT)/windscreen (1850C) • dual-cable rack-and-pinion steering • 1500 gph bilge pump • 6-gauge trolling motor wiring system • tackle management system • 4 interior lights • 4 cleats • 3 battery trays • 30-gallon built-in fuel system

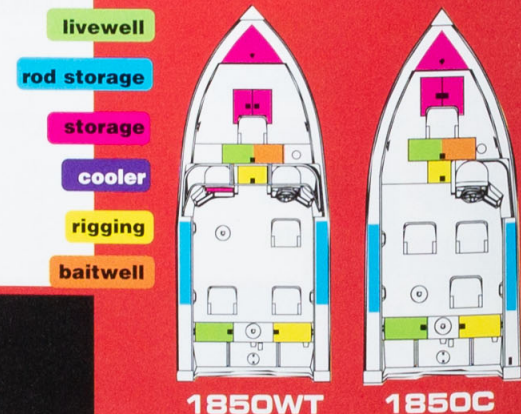


1850WT

1850C



DEEP V 1750 STANDARD PACKAGE Deep V 1750 aluminum boat (walk-through, console or tiller model) • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher with temp and transducer (1750WT & C)/Lowrance X-45 with transducer (1750T)

DEEP V 1750 STANDARD FEATURES polyurethane two-component paint • composite floors and decks • Skeeter speedometer, tachometer, trim gauge, fuel gauge, water pressure gauge, volt meter and horn • 4 fishing chairs, pedestals and 5 base plates (1750 WT & C)/3 fishing chairs, pedestals and 4 base plates (1750T) • two livewells • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and pump timer • windscreen (1750C)/walk-thru windshield (1750WT) • dual-cable rack-and-pinion steering (except 1750T) • 1500 gph bilge pump • 6-gauge trolling motor wiring system • tackle management system • 4 interior lights • 4 cleats • 3 battery trays • 30-gallon built-in fuel system

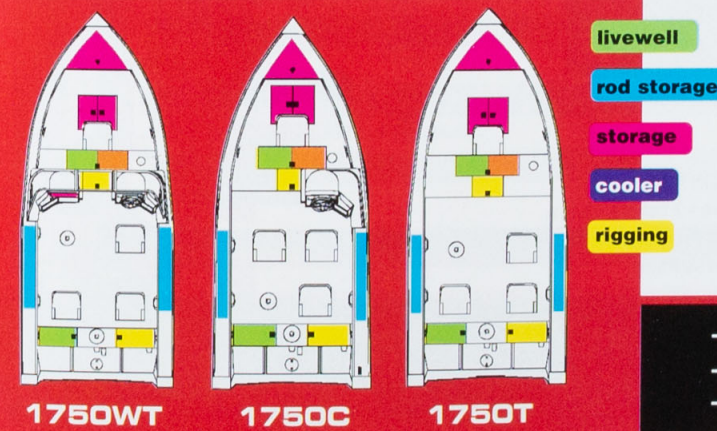

1750WT

1750C

1750T

DEEP V 1750 WT/C/T



Storage

Livewell

Walk-thru
windshield




CAPACITIES & SPECIFICATIONS

length overall 17'6" | beam 92" | bottom width 72" | transom height 20" | interior depth 28" | bow depth 42"
hull thickness .100" | length on trailer 22'9" | width on trailer 98" | max h.p. 130 h.p.(WT&C)/80 h.p.(T)
max weight capacity 1,350 lbs. | max persons capacity 6/800lbs.(WT & C)/7/925 lbs.(T) | fuel capacity 30 gals.

DEEP V 1650

C/T

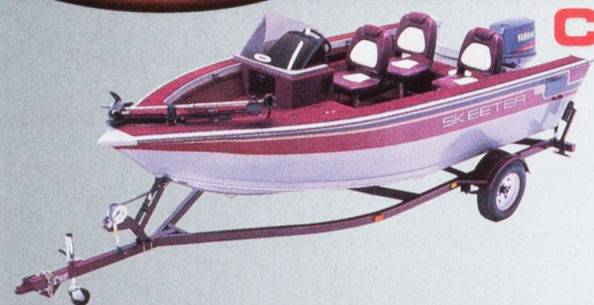


DEEP V 1650 STANDARD PACKAGE Deep V 1650 aluminum boat (console or tiller model) • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher with temp and transducer (1650C)/Lowrance X-45 with transducer (1650T)

DEEP V 1650 STANDARD FEATURES polyurethane two-component paint • composite floors and decks • Skeeter speedometer, tachometer, trim gauge, fuel gauge, water pressure gauge, volt meter and horn • 4 fishing chairs, pedestals and 5 base plates (1650C)/3 fishing chairs, pedestals and 4 base plates (1650T) • two livewells • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and pump timer • windscreen (1650C) • single-cable rack-and-pinion steering (1650C) • 1500 gph bilge pump • 6-gauge trolling motor wiring system • tackle management system • 4 interior lights • 4 cleats • 3 battery trays • 20-gallon built-in fuel system

CAPACITIES & SPECIFICATIONS

length overall 16'5" | beam 85" | bottom width 67" | transom height 20" | interior depth 28" | hull thickness .080"
length on trailer 21'6" | width on trailer 90" | bow depth 38" | max h.p. 90 h.p. (C)/60 h.p. (T)
max weight capacity 1,300 lbs. | max persons capacity 6/750 lbs. | fuel capacity 20 gals.

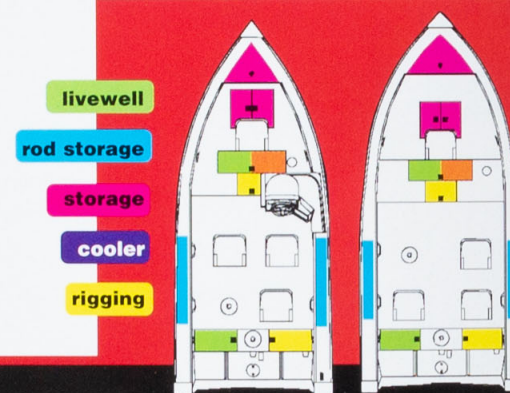


1650C

1650T

BASS & WALLEYE 1650

BW

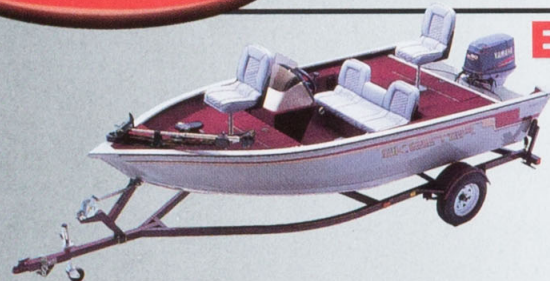


BASS & WALLEYE 1650 STANDARD PACKAGE 1650BW aluminum boat • Skeeter custom tube trailer with spare tire carrier and tie-downs • Zercom CID-40 flasher with temp and transducer

BASS & WALLEYE 1650 STANDARD FEATURES polyurethane two-component paint • composite floors and decks • Skeeter speedometer, tachometer, trim gauge, fuel gauge, water pressure gauge, volt meter and horn • driver and passenger seats with cooler and drink holders • 2 fishing chairs, pedestals and base plates • aerated livewell • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and pump timer • windscreen • single-cable rack-and-pinion steering • 1500 gph bilge pump • 6-gauge trolling motor wiring system • 2 interior lights • 4 cleats • 3 battery trays • 20-gallon built-in fuel system

CAPACITIES & SPECIFICATIONS

length overall 16'8" | beam 85" | bottom width 67" | transom height 20" | interior depth 26"
hull thickness .080" | length on trailer 21'8" | width on trailer 90" | bow depth 36" | max h.p. 90 h.p.
max weight capacity 1,300 lbs. | max persons capacity 6/750 lbs. | fuel capacity 20 gals.

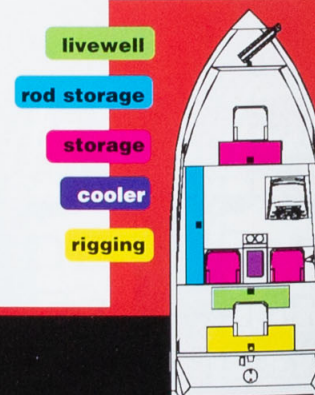

1650BW

ALUMINUM OPTIONAL EQUIPMENT

| | ZX19 | ZX18 | ZX17 | SX18 | SX17 | SX17PF | 1850WT | 1850C | 1750WT | 1750C | 1750T | 1650T | 1650C | 1650BW |
|--|------|------|------|------|------|--------|--------|-------|--------|-------|-------|-------|-------|--------|
| Passenger Console with Windscreen | • | • | | | | | | | | | | | | |
| Fishing Chair and Pedestal | | | | | | | • | • | • | • | • | • | • | • |
| Bike Seat and Adjustable Pedestal | • | • | • | • | • | | • | • | • | • | • | • | • | • |
| Yamaha Aluminum Propeller | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Yamaha Stainless Steel Propeller | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Stainless Steel Handrails | | | | • | • | | | | | | | | | |
| Spare Tire and Wheel | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Chrome Wheel Exchange (each) | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Galvanizing (including wheels) | • | • | • | • | • | • | | | | | | | | |
| Skeeter ZX55H Trolling Motor with Gator Mount, hand operated | • | • | • | | | | | | | | | | | |
| Skeeter ZX55 Trolling Motor with Gator Mount, foot operated | | • | • | | | | | | | | | | | |
| MotorGuide GW62, 62 lb., 50" Great White Trolling Motor, Bow Mount (foot operated) | | | | | | | • | • | • | • | • | • | • | • |
| MotorGuide GW62, 62 lb., 50" Great White Trolling Motor, Bow Mount (hand operated) | | | | | | | • | • | • | • | • | • | • | • |

RECOMMENDED ENGINES

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Yamaha F9.9 ELR | | | | • | • | • | | | | | | | | |
| Yamaha F25 TLR | | | | • | • | • | | | | | | | | |
| Yamaha 25 TLR | | | | • | • | • | | | | | | | | |
| Yamaha 40 TLR | | | | | | | | | | | | | • | • |
| Yamaha C40 TLR | | | | • | • | • | | | | | | | • | • |
| Yamaha C50 TLR | | | | • | • | | | | | | | | • | • |
| Yamaha F50 TLR (includes Tiller Handle, dealer installed) | | | | • | • | | | | | | | • | • | • |
| Yamaha P60 TLR | | | | | | | | | | | | | • | • |
| Yamaha C60 TLR | | | | | | | | | | | | | • | • |
| Yamaha 70 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha C75 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha P75 TLR | | | | | | | | | | | • | | | |
| Yamaha F80 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha 90 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha C90 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha F100 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha C115 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha 130 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha C150 TLR | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha TRP 150 V Max with props | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha 150 V Max | • | • | • | • | • | | • | • | • | • | | | • | • |
| Yamaha 150 EFI | • | • | • | • | • | | • | • | • | • | | | • | • |


PONTOON

PONTOON BOAT PB20F/PB20C/PB24 STANDARD FEATURES


- marine floors and decks with lifetime warranty against rot • all-aluminum performance/splash shield • all-aluminum motor pod • anodized aluminum railings • 4 fishing chairs, extensions and bases (PB20F) • 2 aerated livewells (PB20F) • dual width roto-molded helm seat • deluxe console with windscreen, tilt steering, Skeeter speedometer, tachometer, volt meter, trim gauge, water pressure gauge, fuel gauge and horn • AM/FM stereo radio with cassette player and speakers • courtesy lights • 2 front roto-molded couches with storage (PB20C, PB24) • rear (L-shaped) roto-molded couch (PB20C, PB24) • 48 qt. cooler • ABS dinette table with cup holders • privacy enclosure with porta-potty (PB20C, PB24) • tanning deck (PB20C, PB24) • refreshment center with sink and storage area (PB24) • rear entry with fold-up ladder (PB24) • wheelchair-accessible gates • 2 adjustable arm rests/cup holders • color-coordinated bimini top with boot • built-in rod holders • built-in fuel system • 12-volt trolling motor harness and plug (PB20F)



Rod holders



Helm



Sink

OPTIONAL EQUIPMENT


RECOMMENDED ENGINES

| | PB20F | PB20C | PB24 |
|--|-------|-------|------|
| Yamaha Standard Mount Controls with Cables | • | • | • |
| Yamaha Aluminum Propeller | • | • | • |
| Yamaha Stainless Steel Propeller | • | • | • |
| Skeeter ZX41 Trolling Motor (foot operated) 43 lbs. Thrust | • | • | • |
| Single Axle Trailer | • | • | • |
| Tandem Axle Trailer | • | • | • |
| Surge Brakes (axle) | • | • | • |
| Spare Tire and Wheel | • | • | • |
| Yamaha F9.9 TLR | • | • | • |
| Yamaha F25 TLR | • | • | • |
| Yamaha C40 TLR | • | • | • |
| Yamaha C50 TLR | • | • | • |
| Yamaha F50 TLR | • | • | • |
| Yamaha C60 TLR | • | • | • |
| Yamaha 70 TLR | • | • | • |
| Yamaha C75 TLR | • | • | • |
| Yamaha F80 | • | • | • |
| Yamaha 90 TLR | • | • | • |
| Yamaha C90 TLR | • | • | • |
| Yamaha F100 | • | • | • |
| Yamaha C115 TLR | • | • | • |
| Yamaha 130 TLR | • | • | • |

CAPACITIES & SPECIFICATIONS

length overall 20' (PB20F & PB20C) / 24' (PB24) | beam 8' | max h.p. 90 h.p. (PB20F & PB20C) / 130 h.p. (PB24) | pontoon gauge .080" / .100" nose cones
log size 21"x23" U shape | weight 1,800 lbs. (PB20F) / 1,850 lbs. (PB20C) / 2,250 lbs. (PB24) | max weight capacity 2,100 lbs. (PB20F) / 2,050 lbs. (PB20C) / 2,500 lbs. (PB24) | max person capacity 11/1500 lbs. (PB20F & PB20C) / 14/1950 lbs. (PB24) | fuel capacity 12 gals. (PB20F) / 24 gals. (PB20C & PB24)


livewell
table
storage
privacy enclosure
refreshment center
sundeck

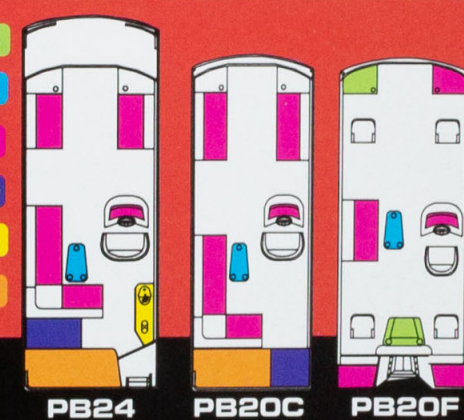

JON BOATS

Skeeter Jonboats are engineered from rugged marine-grade aluminum and feature high-strength extruded ribs, reinforced corner and transom braces, textured non-skid floor and stamped-in keels and bow eyes. Choose from six models, each designed and built to make you a satisfied Skeeter customer for life!

- STANDARD FEATURES**
- all-welded construction (1544, 1648, 1756 & 1860) • riveted construction (1236 and 1436) • v-bow (1544, 1648, 1756 & 1860) • one-piece extruded ribs • reinforced corner and transom braces • textured non-skid floor • reinforced front and rear seats

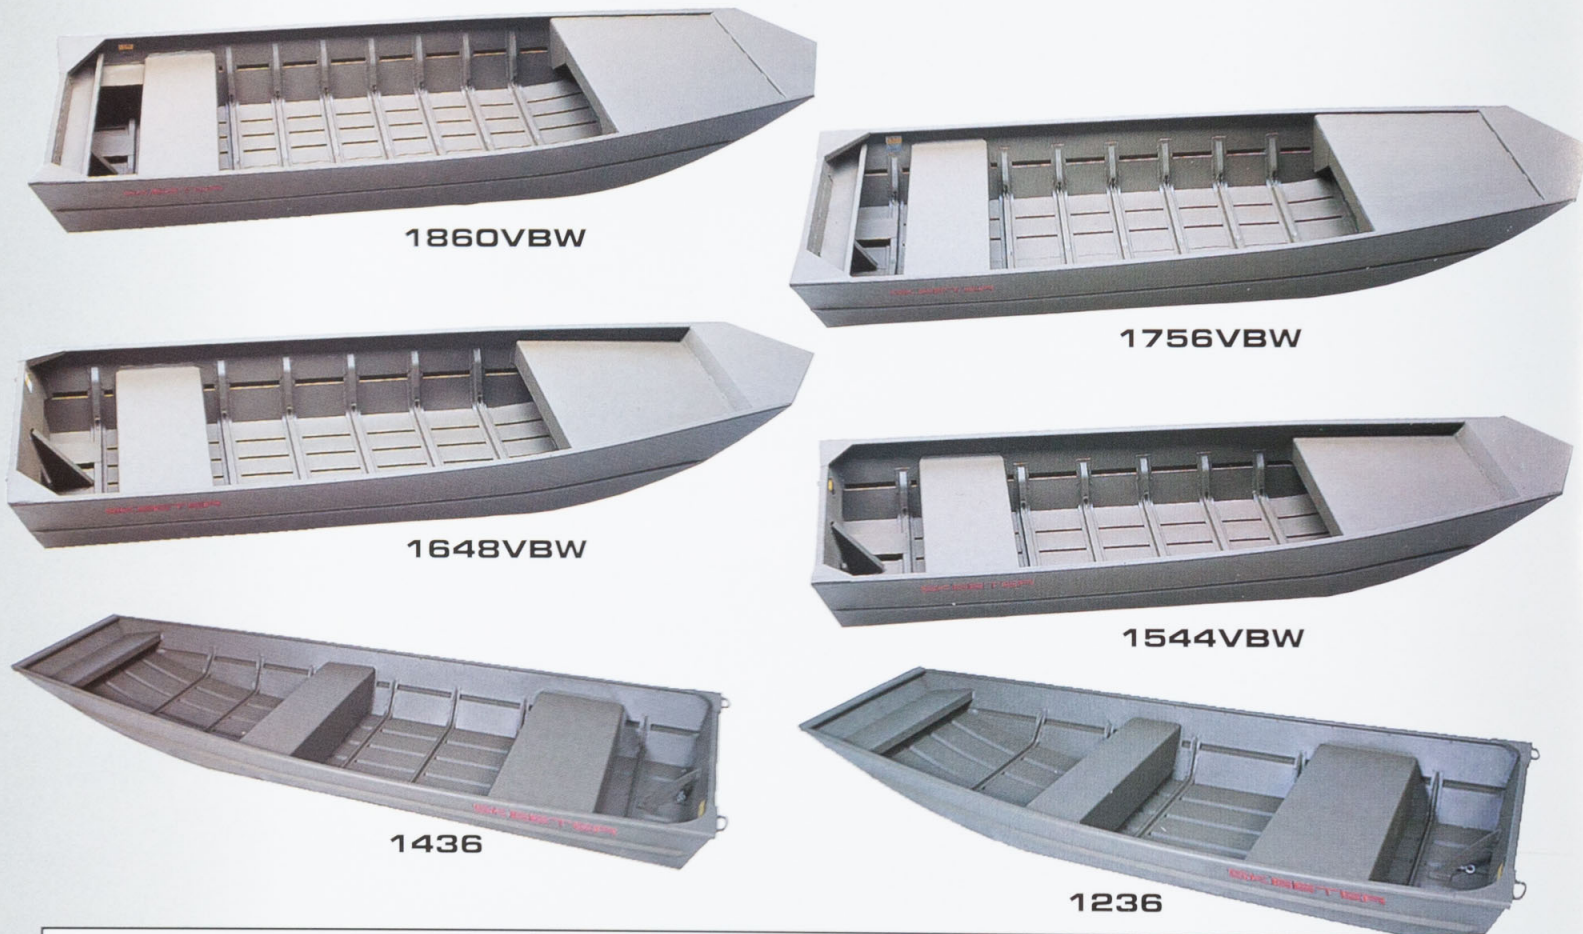


| CAPACITIES & SPECIFICATIONS | | | | | | |
|--------------------------------|----------|----------|----------|----------|------------|------------|
| | 1236 | 1436 | 1544VBW | 1648VBW | 1756VBW | 1860VBW |
| Beam | 56" | 56" | 65" | 70" | 77" | 80" |
| Bottom width | 36" | 36" | 44" | 48" | 56" | 60" |
| Side depth | 18" | 18" | 20" | 21" | 21" | 24" |
| Transom height | 15" | 15" | 16" | 20" | 20" | 20" |
| Hull gauge | .064" | .064" | .100" | .100" | .100" | .100" |
| Max h.p. | 10 h.p. | 15 h.p. | 25 h.p. | 35 h.p. | 40 h.p. | 60 h.p. |
| Max h.p. with console steering | — | — | 25 h.p. | 40 h.p. | 60 h.p. | 75 h.p. |
| Weight capacity | 470 lbs. | 600 lbs. | 700 lbs. | 825 lbs. | 1,170 lbs. | 1,500 lbs. |
| Max persons | 2 | 3 | 3 | 4 | 5 | 7 |
| Seats | 3 | 3 | 2 | 2 | 2 | 2 |
| Boat weight | 144 lbs. | 152 lbs. | 286 lbs. | 332 lbs. | 425 lbs. | 500 lbs. |


OPTIONAL EQUIPMENT (available on 1544, 1648, 1756 and 1860 only): aluminum console with steering helm, bezel, steering wheel & steering cable (dealer installed only) • aluminum console (dealer installed only)

VBW = V bottom welded


UV12

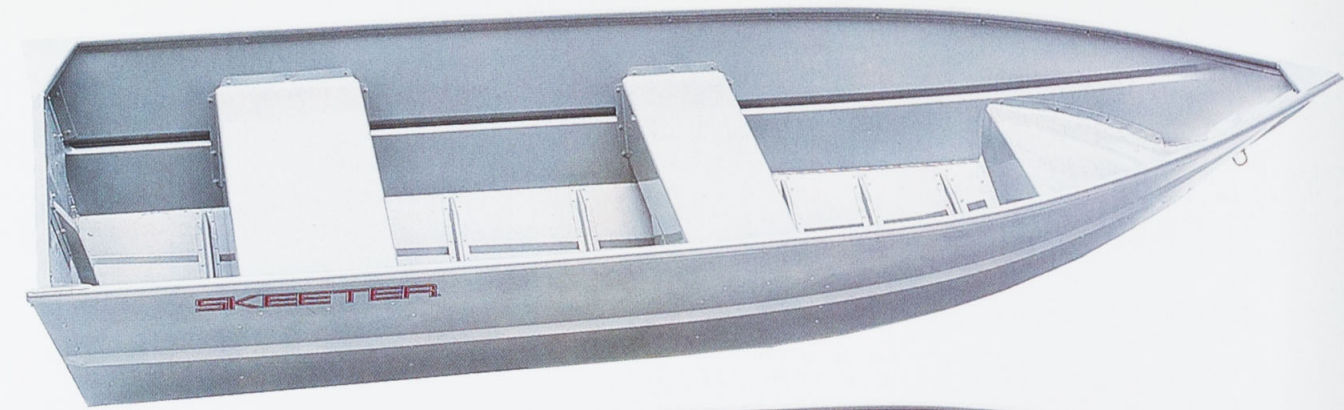

UV14

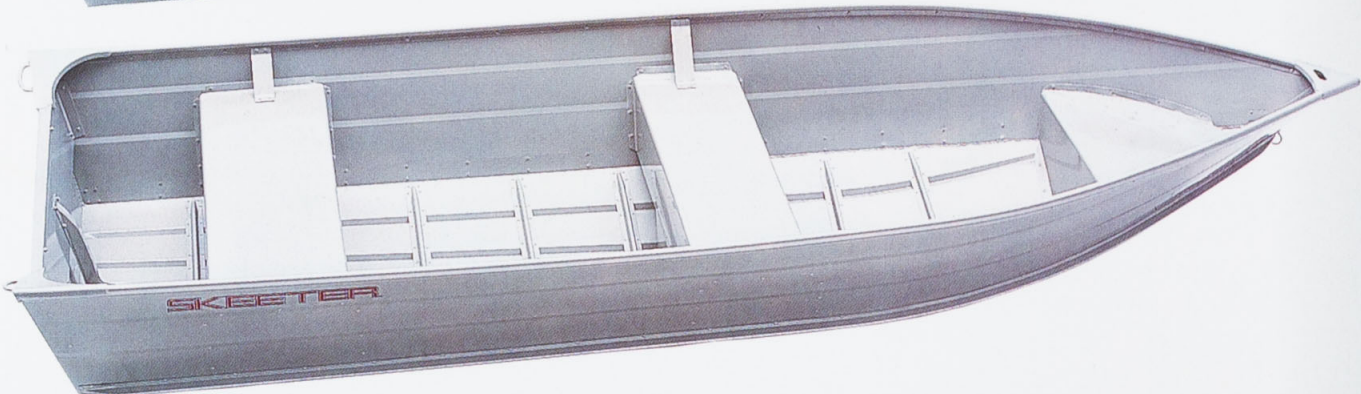

UV16

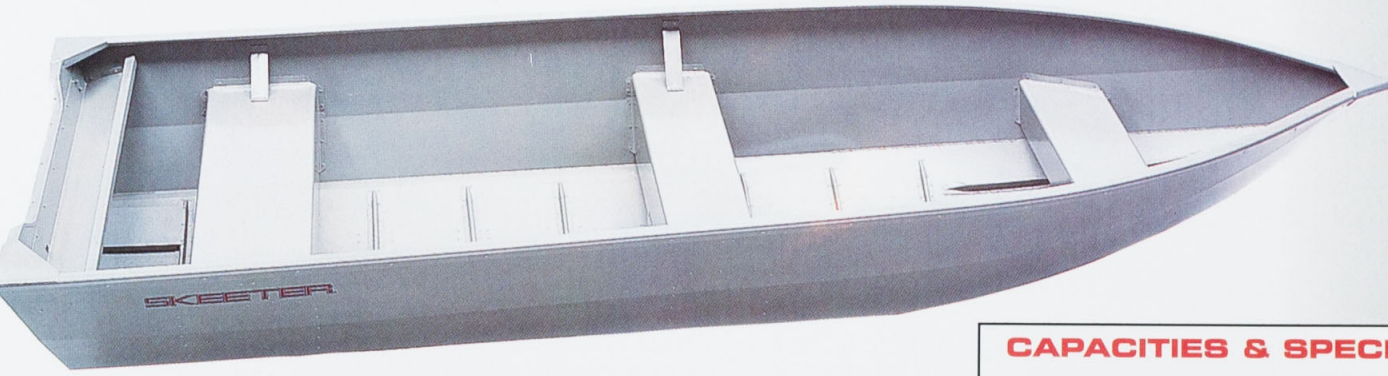

| CAPACITIES & SPECIFICATIONS | | | |
|-----------------------------|----------|----------|------------|
| | UV12 | UV14 | UV16 |
| Beam | 58" | 63" | 75" |
| Bottom width | 39" | 46" | 50" |
| Side depth | 24" | 26" | 30" |
| Transom height | 15" | 15" | 20" |
| Hull gauge | .064" | .064" | .080" |
| Max h.p. | 15 h.p. | 25 h.p. | 40 h.p. |
| Weight capacity | 550 lbs. | 730 lbs. | 1,200 lbs. |
| Max persons | 3 | 3 | 6 |
| Seats | 3 | 3 | 3 |
| Boat weight | 140 lbs. | 180 lbs. | 255 lbs. |


UTILITY V

Skeeter Utility Vs feature the lasting strength of tough marine-grade aluminum, high-strength extruded ribs, reinforced corner and transom braces and textured non-skid floors. Choose from 3 rugged aircraft-riveted models. Whichever you pick, they're Skeeter quality through and through!

STANDARD FEATURES

- riveted construction • V-bow • one-piece extruded ribs • reinforced corner and transom braces • textured non-skid floor • reinforced front and rear seats

SS 90
SC/DC

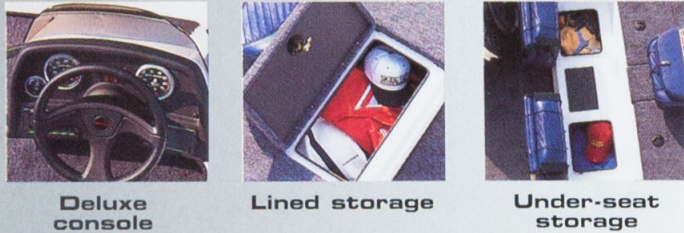

CAPACITIES & SPECIFICATIONS

| | | | | | | | | | |
|---------------------|--------|----------------------|------------|----------------|----------|------------|----------|----------------|---------|
| length on trailer | 20'10" | width on trailer | 86.5" | length overall | 16'2" | beam | 82" | transom height | 20" |
| height overall | 34" | interior depth | 16.5" | draft | 12" | dry weight | 800 lbs. | max h.p. | 90 h.p. |
| max weight capacity | 940 | max persons capacity | 3/390 lbs. | fuel capacity | 18 gals. | | | | |




SS90 STANDARD PACKAGE SS90 fiberglass boat (single or dual console model) • Skeeter single-axle tube trailer with spare tire carrier, tie-downs and transom saver • Skeeter ZX41 foot operated trolling motor (MotorGuide®), 43 lbs. thrust with mount

SS90 STANDARD FEATURES white gelcoat hull and deck with the following:

| | | | |
|--------------------|------------|-----------------|------------|
| Deck & Hull Stripe | Pin Stripe | Upholstery | Carpet |
| Laser | Sterling | Marble/Charcoal | Gunmetal |
| Sherwood | Sahara | Mocha/Tan | Mocha Mist |
| Nassau | Sterling | Marble/Charcoal | Gunmetal |
| Caymen | Sterling | Marble/Charcoal | Gunmetal |

- sequin deck and hull stripe and sequin pinstripe • Skeeter tachometer, speedometer, fuel gauge and horn • bench seat
- fishing chair with 13" fixed extension and bike seat with adjustable pole • tinted windscreen • dual aerated rear livewells
- single-cable steering • insulated doors • bow traction mat • bow and stern lights • 18-gallon fuel system • 800 gph bilge pump • 10-gauge trolling motor wiring system • 2 battery trays • Skeeter transom washer

livewell
rod storage
storage
cooler
rigging

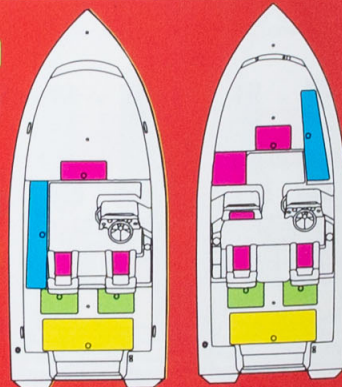

SS90SC SS90DC

SX/SS OPTIONAL EQUIPMENT

| | SX186 | SX176 | SS90 |
|---|-------|-------|------|
| Passenger Console with Windscreen | • | • | • |
| Optional Color Schemes (chosen from 1999 Skeeter Color Guide) | • | • | • |
| In-floor Cooler | • | • | • |
| Automatic Bilge Pump Switch | • | • | • |
| Chrome Cleats (pair) | • | • | • |
| Lowrance X-45 with Transducer | • | • | • |
| Lowrance X-65 with Transducer | • | • | • |
| Lowrance X-75 with Transducer | • | • | • |
| Lowrance X-85 with Transducer | • | • | • |
| Zercom CID-40 Flasher with Temp and Transducer (bow only) | • | • | • |
| Lowrance Transducer (each) | • | • | • |
| Yamaha Deluxe Flush Mount Motor Controls with Cables | • | • | • |
| Factory Rigging | • | • | • |
| Yamaha Aluminum Propeller | • | • | • |
| Yamaha Stainless Steel Propeller | • | • | • |
| Bike Seat with Adjustable Extension | • | • | • |
| Stainless Steel Handrails | • | • | • |
| Spare Tire and Alumalook Wheel | • | • | • |
| Chrome Wheel Exchange (each) | • | • | • |
| Aluminum Wheel Exchange (each) | • | • | • |
| Swing-away Tongue | • | • | • |
| Swing-away Tongue with Brakes | • | • | • |
| Surge Brakes | • | • | • |
| Disc Brakes | • | • | • |
| Disc Brakes; 2nd Axle | • | • | • |
| Galvanizing (including wheels) | • | • | • |
| Side Guides | • | • | • |
| Tandem Axle | • | • | • |
| Skeeter ZX55H Trolling Motor, hand operated | • | • | • |
| Skeeter ZX55 Trolling Motor, foot operated (exchange) | • | • | • |
| Yamaha C60 TLR | | | • |
| Yamaha C75 TLR | | | • |
| Yamaha F80 TLR | | | • |
| Yamaha 90 TLR | | • | • |
| Yamaha C90 TLR | | • | • |
| Yamaha F100 TLR | | • | • |
| Yamaha C115 TLR | • | • | • |
| Yamaha 130 TLR | • | • | • |
| Yamaha C150 | • | • | • |
| Yamaha TRP 150 V Max with props | • | • | • |
| Yamaha 150 V Max | • | • | • |
| Yamaha 150 EFI | • | • | • |

See flake finishes, gelcoats, upholstery and carpeting color options on page 32.

DEEP V 1775

WT/SC/T



Tackle management system



Console with wrap-around windshield



Fishing chair



CAPACITIES & SPECIFICATIONS


length on trailer 22'6" | width on trailer 99" | length overall 17'8" | beam 88" | transom height 22" | height overall 47"(T)/68"(SC/WT)
interior depth 25" | draft 12" | dry weight 1,450 lbs.(WT)/1,400 lbs.(SC)/1,300 lbs.(T) | max h.p. 150 h.p.(WT & SC)/80 h.p.(T)
max weight capacity 1,450 lbs. | max persons capacity 6/860 lbs. | fuel capacity 33 gals.




DEEP V 1775 STANDARD PACKAGE Deep V 1775 fiberglass boat (walk-through, single console or tiller model) • Skeeter single-axle tube trailer with spare tire carrier, tie-downs and transom saver • Zercom CID-40 flasher (dash) with temp and rear transducer (1775WT & SC)

DEEP V 1775 STANDARD FEATURES composite construction • white or sand gelcoat deck and hull • sequin deck and hull stripe • sequin pin stripes • Skeeter tachometer, speedometer, volt meter, water pressure gauge, trim gauge, fuel gauge and horn (1775WT & SC)/Skeeter tachometer, speedometer, fuel gauge & horn (1775T) • fixed driver's chair with seat slider • 3 moveable fishing chairs and 4 floor bases (1775WT & SC)/2 moveable fishing chairs & 3 floor bases (1775T) • 2 power pedestals • 2 adjustable pedestals (1775WT & SC)/1 adjustable pedestal (1775T) • bow and stern livewells • separate bow baitwell (except 1775WT) • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable pump timer • dual-cable rack-and-pinion tilt steering (1775WT & SC) • walk-thru windshield (1775WT)/wind-screen (1775SC) • bow traction mat • manual 800 gph bilge pump and automatic 1500 gph bilge pump • tackle management system (bow) • bow trolling motor battery storage • 6-gauge 12/24-volt trolling motor wiring system • 2 rod lockers • 4 interior lights • 4 cleats • 3 battery trays • 33-gallon built-in fuel system


livewell
rod storage
storage
cooler
rigging
baitwell

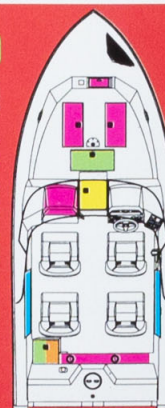

1775WT

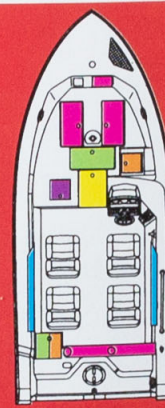

1775SC

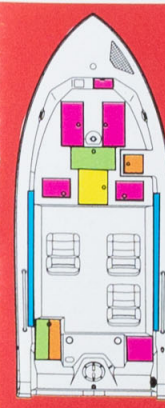

1775T

DEEP V OPTIONAL EQUIPMENT

RECOMMENDED ENGINES

| | 1850DV | 1775T | 1775SC | 1775WT |
|--|--------|-------|--------|--------|
| Full Sequin Finish | • | • | • | • |
| Moor Mate's (pair) | • | • | • | • |
| Tilt Hydraulic Steering | • | • | • | • |
| Dual Windscreens (exchange) | • | • | • | • |
| Stainless Steel Hand Rails (stern) | • | • | • | • |
| Dual Pro Charger (not installed at factory) | • | • | • | • |
| Fishing Chair with Adjustable Extension | • | • | • | • |
| Bike Seat with Adjustable Extension | • | • | • | • |
| Lowrance X-45 with Transducer | • | • | • | • |
| Lowrance X-65 with Transducer | • | • | • | • |
| Lowrance X-75 with Transducer | • | • | • | • |
| Lowrance X-85 with Transducer | • | • | • | • |
| Zercom CID-40 Flasher with Temp and Transducer (bow only) | • | • | • | • |
| Lowrance Transducer (each) | • | • | • | • |
| Yamaha Deluxe Flush Mount Controls with Cables | • | • | • | • |
| Factory Rigging | • | • | • | • |
| Yamaha Aluminum Propeller | • | • | • | • |
| Yamaha Stainless Steel Propeller | • | • | • | • |
| Canopy Top | • | • | • | • |
| Side and Aft Curtains | • | • | • | • |
| Bow Cushions | • | • | • | • |
| Boarding Ladder | • | • | • | • |
| Skeeter Transom Washer | • | • | • | • |
| Chrome Wheel Exchange (each) | • | • | • | • |
| Aluminum Wheel Exchange (each) | • | • | • | • |
| Swing-away Tongue | • | • | • | • |
| Swing-away Tongue with Brakes | • | • | • | • |
| Surge Brakes; One Axle | • | • | • | • |
| Disc Brakes; One Axle | • | • | • | • |
| Tandem Axle (exchange) | • | • | • | • |
| Disc Brakes; 2nd Axle | • | • | • | • |
| Galvanizing (including wheels) | • | • | • | • |
| Skeeter Cut-out steps (Single Axle) | • | • | • | • |
| Skeeter Cut-out steps (Tandem Axle) | • | • | • | • |
| Side Guides | • | • | • | • |
| Trailer Loading Lights | • | • | • | • |
| Spare Tire | • | • | • | • |
| MotorGuide GW62, 62 lb., 50" Great White Trolling Motor, Bow Mounted (hand operated) | • | • | • | • |
| MotorGuide GW62, 62 lb., 50" Great White Trolling Motor, Bow Mounted (foot operated) | • | • | • | • |
| Yamaha F50 TLR (Includes Tiller Handle, Dealer Installed) | • | • | • | • |
| Yamaha P60 TLH | • | • | • | • |
| Yamaha P75 TLH | • | • | • | • |
| Yamaha F80 TLR (Includes Tiller Handle, Dealer Installed) | • | • | • | • |
| Yamaha C115 | • | • | • | • |
| Yamaha 130 | • | • | • | • |
| Yamaha C150 | • | • | • | • |
| Yamaha 150 V Max | • | • | • | • |
| Yamaha 150 EFI | • | • | • | • |
| Yamaha 175 V Max (2.6L) | • | • | • | • |

See flake finishes, gelcoats, upholstery and carpeting color options on page 32.

SX 186 SC/DC



Under-seat storage

Extra-large storage compartment

Deluxe console



CAPACITIES & SPECIFICATIONS

| | | | | |
|-------------------------------|---------------------------------|------------------------|-----------------------|--------------------|
| length on trailer 22'9" | width on trailer 98" | length 18'5" | beam 89" | transom height 22" |
| height overall 43" | interior depth 19" | draft 12" | dry weight 1,400 lbs. | max h.p. 150 h.p. |
| max weight capacity 1,290lbs. | max persons capacity 5/715 lbs. | fuel capacity 36 gals. | | |




SX186 STANDARD PACKAGE SX186 fiberglass boat (single or dual console model) • Skeeter single-axle tube trailer with spare tire carrier, tie-downs and transom saver • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX55 foot operated trolling motor (MotorGuide®), 55 lbs. thrust with gator mount

SX186 STANDARD FEATURES composite transom and fiberglass stringer system • white gelcoat hull and deck with the following:

| | | | |
|--------------------|------------|-----------------|------------|
| Deck & Hull Stripe | Pin Stripe | Upholstery | Carpet |
| Laser | Sterling | Marble/Charcoal | Gunmetal |
| Sherwood | Sahara | Mocha/Tan | Mocha Mist |
| Nassau | Sterling | Marble/Charcoal | Gunmetal |
| Caymen | Sterling | Marble/Charcoal | Gunmetal |

- sequin deck and hull stripe and sequin pinstripe • Skeeter tachometer, speedometer, fuel gauge, trim gauge, and horn
- bench seat • 2 fishing chairs with 13" fixed extension • tinted windscreen • livewell control system with "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • dual rear livewells • gas-assisted lifts on rod box doors and bilge access door
- dual-cable steering • 2 built-in retractable Rod Staze™ • insulated doors
- bow traction mat • bow and stern lights • 36-gallon fuel system • 800 gph bilge pump • 6-gauge trolling motor wiring system • 3 battery trays
- Skeeter transom washer • 4 cleats

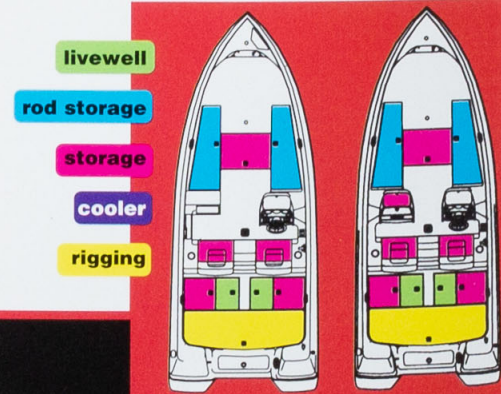

SX186SC SX186DC




SX176 STANDARD PACKAGE SX176 fiberglass boat (single or dual console model) • Skeeter single-axle tube trailer with spare tire carrier, tie-downs and transom saver • Zercom CID-40 flasher (dash) with temp and rear transducer • Skeeter ZX41 foot operated trolling motor (MotorGuide®), 43 lbs. thrust with mount

SX176 STANDARD FEATURES composite transom and fiberglass stringer system • white gelcoat hull and deck with the following:

| | | | |
|--------------------|------------|-----------------|------------|
| Deck & Hull Stripe | Pin Stripe | Upholstery | Carpet |
| Laser | Sterling | Marble/Charcoal | Gunmetal |
| Sherwood | Sahara | Mocha/Tan | Mocha Mist |
| Nassau | Sterling | Marble/Charcoal | Gunmetal |
| Caymen | Sterling | Marble/Charcoal | Gunmetal |

- sequin deck and hull stripe and sequin pinstripe • Skeeter tachometer, speedometer, fuel gauge, trim gauge, and horn
- bench seat • 2 fishing chairs with 13" fixed extension • tinted windscreen • livewell control system with "FILL," "RECIRCULATING" and "DRAIN" modes and adjustable livewell pump timer • divided rear livewell • gas-assisted lifts on rod box doors and bilge access door
- single-cable steering • 2 built-in retractable Rod Staze™ • insulated doors
- bow traction mat • bow and stern lights • 24-gallon fuel system
- 800 gph bilge pump • 6-gauge trolling motor wiring system • 2 battery trays
- Skeeter transom washer • 4 cleats

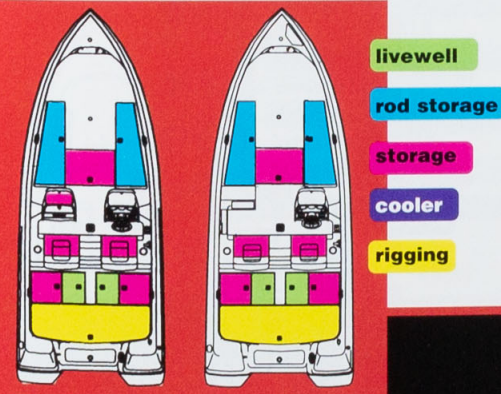

SX176DC SX176SC

SX 176 SC/DC



Roomy rod boxes

Deluxe console with 3-across seating

Divided rear livewell



CAPACITIES & SPECIFICATIONS

| | | | | |
|--------------------------------|---------------------------------|------------------------|-----------------------|--------------------|
| length on trailer 22'2" | width on trailer 94" | length 17'8" | beam 82" | transom height 20" |
| height overall 46" | interior depth 19" | draft 12" | dry weight 1,325 lbs. | max h.p. 130 h.p. |
| max weight capacity 1,150 lbs. | max persons capacity 5/640 lbs. | fuel capacity 24 gals. | | |

DEEP V

FIBERGLASS SERIES

Performance Driven and Built to Last. Skeeter Deep Vs are built for big water. Their hydrodynamically designed Deep V hulls make a Skeeter Deep V ride fast and dry in even the worst chop. They're rugged, too. Skeeter's unique X-TREME and X-CEL composite construction are used in all Deep V floors, stringers and transoms, for lasting performance year after year under even the harshest conditions.

Fishability features are built in, too, including roomy livewells, a baitwell, large-capacity cooler and tackle storage boxes for all your gear. Console models feature our ergonomically engineered cockpit design, with full instrumentation and state-of-the-art Zecom electronics.

When you're ready for big water, you're ready for Skeeter Deep V.

Skeeter reserves the right to change products and specifications without notice. All material in the catalog is believed to be correct at time of publication. Some optional equipment may be shown in some photographs.

YAMAHA
Outboards

SKEETER
PERFORMANCE FISHING BOATS

DEEP V 1850


DEEP V 1850 STANDARD PACKAGE

Deep V 1850 fiberglass boat • walk-thru consoles • Skeeter single-axle tube trailer with spare tire and carrier, tie-downs, disc brakes and transom saver • Zecom CID-40 flasher (dash) with temp and rear transducer

DEEP V 1850 STANDARD FEATURES

white or sand deck and hull • sequin deck and hull stripe • sequin pin stripes • Skeeter tachometer, speedometer, volt meter, water pressure gauge, trim gauge, fuel gauge and horn • fixed driver's chair with seat slider • 3 moveable fishing chairs and 4 floor bases • bow and stern livewells • livewell control system featuring "FILL," "RECIRCULATING" and "DRAIN" modes and pump timer • dual-cable rack-and-pinion tilt steering • walk-thru windshield • bow traction mat • manual 800 gph bilge pump and automatic 1500 gph bilge pump • tackle management system (bow) • 4 cleats • 4 interior lights • 6-gauge 12/24-volt trolling motor wiring system • 2 rod boxes • 3 battery trays • 33-gallon built-in fuel system • 6-gallon built-in kicker motor fuel system

Rod lockers



Baitwell



Tackle management system



livewell
rod storage
storage
cooler
rigging
baitwell



1850DV

CAPACITIES & SPECIFICATIONS

| | | | | |
|--------------------------------|---------------------------------|-----------------------------|-----------------------|--------------------|
| length on trailer 23'4" | width on trailer 94.5" | length overall 18'6" | beam 88" | transom height 22" |
| height overall 68" | interior depth 25" | draft 12" | dry weight 1,475 lbs. | max h.p. 175 h.p. |
| max weight capacity 1,450 lbs. | max persons capacity 8/860 lbs. | main fuel capacity 33 gals. | | |

BAY PRO

FIBERGLASS SERIES

First-Class Bay and Offshore Performance. Skeeter's Bay Pro takes bay and offshore performance and reliability to a new level. With Skeeter's exclusive X-TREME composite transom and stringer system, our Bay Pro design is lighter and stronger than ever. That means great performance in shallow as well as deep water. Plus, our patented V-pad hull flattens the roughest water for a smoother, drier ride.

The deck layout - it's a saltwater fisherman's dream! Plenty of room to maneuver as you land the catch of the day. A well-designed center console with Skeeter gauges makes navigating easy. And the large bow deck with huge livewell and lots of storage space makes Skeeter's Bay Pro the ultimate in fishability.

This is the boat to get into when you're into bigwater fishing.

Skeeter reserves the right to change products and specifications without notice. All material in the catalog is believed to be correct at time of publication. Some optional equipment may be shown in some photographs.

YAMAHA
Outboards

SKEETER
PERFORMANCE FISHING BOATS

BP 21L

BP21L STANDARD PACKAGE

Bay Pro 21L fiberglass boat • Skeeter galvanized tandem-axle trailer with brakes, flush kit, black wall tires, tie-downs, transom saver, spare tire and carrier

BP21L STANDARD FEATURES

composite construction • white gelcoat hull and sides, with sequin hull stripe • white inner liner • 68-quart ice chest/seat combination with two-position back rest • center console command center with 8 rod holders and Skeeter speedometer, tachometer, fuel gauge, horn, trim gauge and water pressure gauge • windshield with full stainless steel rail • front baitwell with recirculating pump • rear livewell • forward console seating with back rest • storage area under front deck • rear casting deck • storage area under rear deck • built-in tackle trays • 60-gallon built-in fuel system • stainless steel rails • 6-gauge trolling motor wiring system • dual-cable steering system • 3 battery trays



| BP21L | |
|--|---|
| Tilt Hydraulic Steering Exchange | • |
| Fishing Seat and 13" Fixed Height Pedestal (each) | • |
| Bike Seat with Adjustable Pro Pole (each) | • |
| Factory Rigging | • |
| Compass | • |
| Rear Pedestal Base | • |
| Yamaha Binnacle Controls with Cables | • |
| Yamaha Stainless Steel Propeller | • |
| 10" Jackplate | • |
| Skeeter Transom Washer | • |
| Lowrance X-45 with Transducer (dash only) | • |
| Lowrance X-65 with Transducer (dash only) | • |
| Lowrance X-75 with Transducer (dash only) | • |
| Lowrance X-85 with Transducer (dash only) | • |
| Lowrance Transducer (each) | • |
| Swing-away Tongue | • |
| Side Guides | • |
| MotorGuide GW62, 62 lb., 50" Great White Trolling Motor, Bow Mounted (hand operated) | • |
| MotorGuide GW62, 62 lb., 50" Great White Trolling Motor, Bow Mounted (foot operated) | • |
| Yamaha C150 TXR | • |
| Yamaha S150 TXR | • |
| Yamaha S175 TXR | • |
| Yamaha S200 TXR | • |
| Yamaha S225 TXR | • |

BAY PRO OPTIONAL EQUIPMENT


RECOMMENDED ENGINES

8 Rod holders

Helm

Under-seat ice chest

livewell
rod storage
storage
cooler
rigging
baitwell

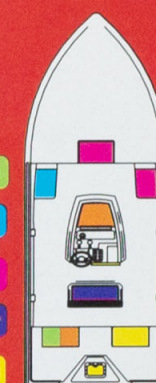

BP21L

CAPACITIES & SPECIFICATIONS

length on trailer 26'10" | width on trailer 96" | length overall 21' | beam 100" | transom height 25"
height overall 74" | interior depth 21" | draft 14" | dry weight 1,875 lbs. | max h.p. 225 h.p.
max weight capacity 1,539 lbs. | max persons capacity 6/8/14 lbs. | fuel capacity 60 gals.



SKEETER

ALUMINUM SERIES



Skeeter's Complete Line of Aluminum Boats for 1999. Every Skeeter Aluminum model is built to live up to the Skeeter legend for rugged durability, unmatched fishability and lasting performance. We use only the toughest marine-grade aluminum and top-quality, heavy-duty materials. Our engineers test and retest every design until it's the best it can be. And then we put over 30 years of aluminum boat-building expertise to work to create the perfect craft for fishing and family fun.

Skeeter's complete aluminum line includes 28 models to choose from: fully-rigged bass boats, rugged Deep V boats, bass and walleye models and a complete line of pontoons. Standard features include performance-matched electronics, ergonomically designed cockpits (console models only), plenty of tackle storage and more. And all are backed by the performance and prestige of exceptional Yamaha power.

Our ZX aluminum boats feature all-welded X-TREME channel construction and true-performance pad hull designs, making them exceptionally fast, durable and easy to maneuver. And our SX aluminum bass boats feature the new X-CALIBUR modified-vee hull for an outstanding ride.

From the dedication to quality and craftsmanship to the unsurpassed strength, durability and smooth, dry ride, Skeeter's new aluminum line introduces an exciting new era in marine engineering — and a new chapter in the extraordinary legend of Skeeter.

Skeeter reserves the right to change products and specifications without notice. All material in the catalog is believed to be correct at time of publication. Some optional equipment may be shown in some photographs.

YAMAHA
Outboards

Eat. Sleep. Fish.™



SKEETER
PERFORMANCE FISHING BOATS



SKEETER

PERFORMANCE FISHING BOATS

A Yamaha Boat Company

Skeeter Products, Inc. • One Skeeter Road • P.O. Box 230 • Kilgore, TX 75663-0230
1-800-SKEETER
www.skeeterboats.com

For Skeeter clothing and accessories, contact your local Skeeter dealer or a Customer Service Representative at CYRK 1.800.544.8794.

Skeeter supports our country's vast fisheries by promoting catch and release and is committed to preserving the environment in our manufacturing practices.

Some of the features shown and described are available only on specific Skeeter models. Skeeter reserves the right to change products and specifications without notice. All material in the catalog is believed to be correct at time of publication. Some optional equipment may be shown in some photographs. See the Skeeter dealer nearest you for the latest information on all Skeeter boats and gear.

©1999, Skeeter Products, Inc.

YAMAHA
Outboards

Eat. Sleep. Fish.™